



### CST4953B Dual P-Ch 20V Fast Switching MOSFETs

#### CST4953B General Description

The CST4953B is the highest performance trench N-ch and P-ch MOSFETs with extreme high cell density, which provide excellent RDSON and gate charge for most of the synchronous buck converter applications.

The CST4953B meet the RoHS and Green Product requirement, 100% EAS guaranteed with full function reliability approved.

#### CST4953B Features

- Advanced high cell density Trench technology
- Super Low Gate Charge
- Excellent CdV/dt effect decline
- Green Device Available


#### CST4953B Product Summary

BVDSS	RDSON	ID
-20V	55mΩ	-5 A

#### CST4953B Applications

- Power management in half bridge and inverters
- DC-DC Converter
- Load Switch

#### CST4953B SOP-8 Pin Configuration

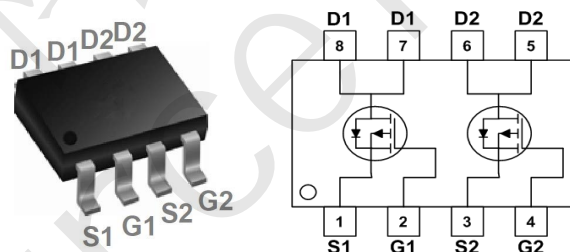

#### CST4953B Absolute Maximum Ratings

Symbol	Parameter	Rating	Units
$V_{DS}$	Drain-Source Voltage	-20	V
$V_{GS}$	Gate-Source Voltage	$\pm 12$	V
$I_D@T_C=25^\circ C$	Continuous Drain Current, $-V_{GS} @ -10V^1$	-5.0	A
$I_D@T_C=100^\circ C$	Continuous Drain Current, $-V_{GS} @ -10V^1$	-3.0	A
$I_{DM}$	Pulsed Drain Current <sup>2</sup>	-20	A
$P_D@T_C=25^\circ C$	Total Power Dissipation <sup>3</sup>	2.0	W
$T_{STG}$	Storage Temperature Range	-55 to 150	$^\circ C$
$T_J$	Operating Junction Temperature Range	-55 to 150	$^\circ C$

#### CST4953B Thermal Data

Symbol	Parameter	Typ.	Max.	Unit
$R_{\theta JA}$	Thermal Resistance Junction-Ambient <sup>1</sup>	---	85	$^\circ C/W$
$R_{\theta JC}$	Thermal Resistance Junction-Case <sup>1</sup>	---	36	$^\circ C/W$



### CST4953B Dual P-Ch 20V Fast Switching MOSFETs

#### CST4953B Electrical Characteristics (T<sub>J</sub>=25°C unless otherwise specified)

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Units
<b>Off Characteristic</b>						
V <sub>(BR)DSS</sub>	Drain-Source Breakdown Voltage	V <sub>GS</sub> =0V, I <sub>D</sub> = -250μA	-20	-	-	V
I <sub>DSS</sub>	Zero Gate Voltage Drain Current	V <sub>DS</sub> = -20V, V <sub>GS</sub> =0V,	-	-	-1	μA
I <sub>GSS</sub>	Gate to Body Leakage Current	V <sub>DS</sub> =0V, V <sub>GS</sub> = ±12V	-	-	±100	nA
<b>On Characteristics</b>						
V <sub>GS(th)</sub>	Gate Threshold Voltage	V <sub>DS</sub> =V <sub>GS</sub> , I <sub>D</sub> = -250μA	-0.5	-0.7	-1.0	V
R <sub>DS(on)</sub>	Static Drain-Source on-Resistance <small>note2</small>	V <sub>GS</sub> = -4.5V, I <sub>D</sub> = -3A	-	55	70	mΩ
		V <sub>GS</sub> = -2.5V, I <sub>D</sub> = -2A	-	70	100	
<b>Dynamic Characteristics</b>						
C <sub>iss</sub>	Input Capacitance	V <sub>DS</sub> = -10V, V <sub>GS</sub> =0V, f=1.0MHz	-	503	-	pF
C <sub>oss</sub>	Output Capacitance		-	67	-	pF
C <sub>rss</sub>	Reverse Transfer Capacitance		-	58	-	pF
Q <sub>g</sub>	Total Gate Charge	V <sub>DS</sub> = -10V, I <sub>D</sub> = -2A, V <sub>GS</sub> = -4.5V	-	4.1	-	nC
Q <sub>gs</sub>	Gate-Source Charge		-	0.8	-	nC
Q <sub>gd</sub>	Gate-Drain("Miller") Charge		-	1.1	-	nC
<b>Switching Characteristics</b>						
t <sub>d(on)</sub>	Turn-on Delay Time	V <sub>DD</sub> = -10V, I <sub>D</sub> = -3A, R <sub>G</sub> =1Ω, V <sub>GEN</sub> = -4.5V, R <sub>L</sub> =1.2Ω	-	11	-	ns
t <sub>r</sub>	Turn-on Rise Time		-	52	-	ns
t <sub>d(off)</sub>	Turn-off Delay Time		-	16	-	ns
t <sub>f</sub>	Turn-off Fall Time		-	10	-	ns
<b>Drain-Source Diode Characteristics and Maximum Ratings</b>						
I <sub>S</sub>	Maximum Continuous Drain to Source Diode Forward Current		-	-	-5	A
I <sub>SM</sub>	Maximum Pulsed Drain to Source Diode Forward Current		-	-	-12	A
V <sub>SD</sub>	Drain to Source Diode Forward Voltage	V <sub>GS</sub> =0V, I <sub>S</sub> = -3A	-	-	-1.2	V

Notes:1. Repetitive Rating: Pulse Width Limited by Maximum Junction Temperature

2. Pulse Test: Pulse Width≤300μs, Duty Cycle≤2%



## CST4953B Typical Performance Characteristics

### P-Channel Typical Characteristics

Figure 1: Output Characteristics

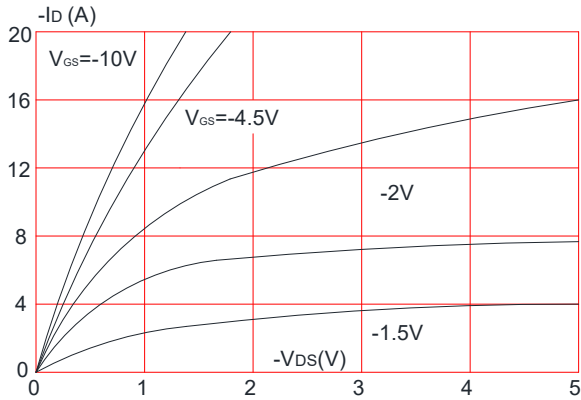


Figure 2: Typical Transfer Characteristics

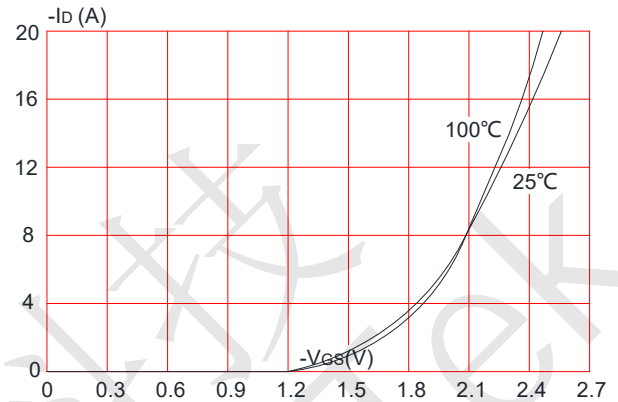


Figure 3: On-resistance vs. Drain Current

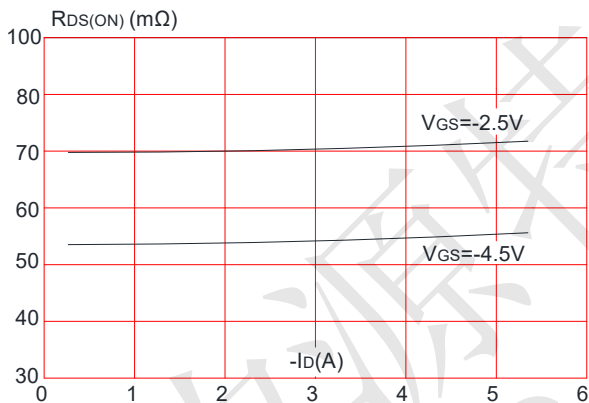


Figure 4: Body Diode Characteristics

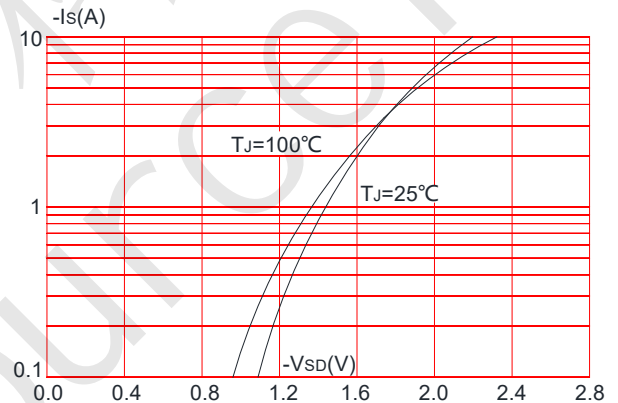


Figure 5: Gate Charge Characteristics



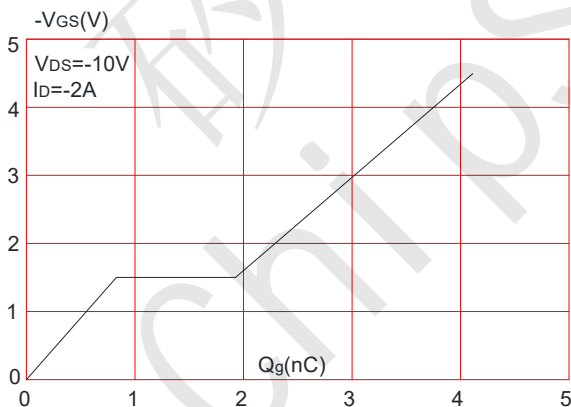


Figure 6: Capacitance Characteristics



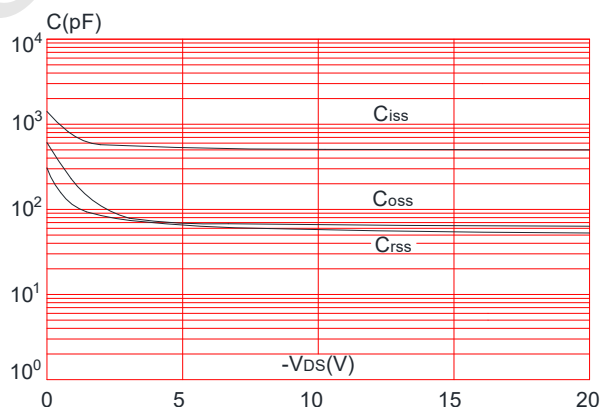

CST4953B SOP-8 Package Information

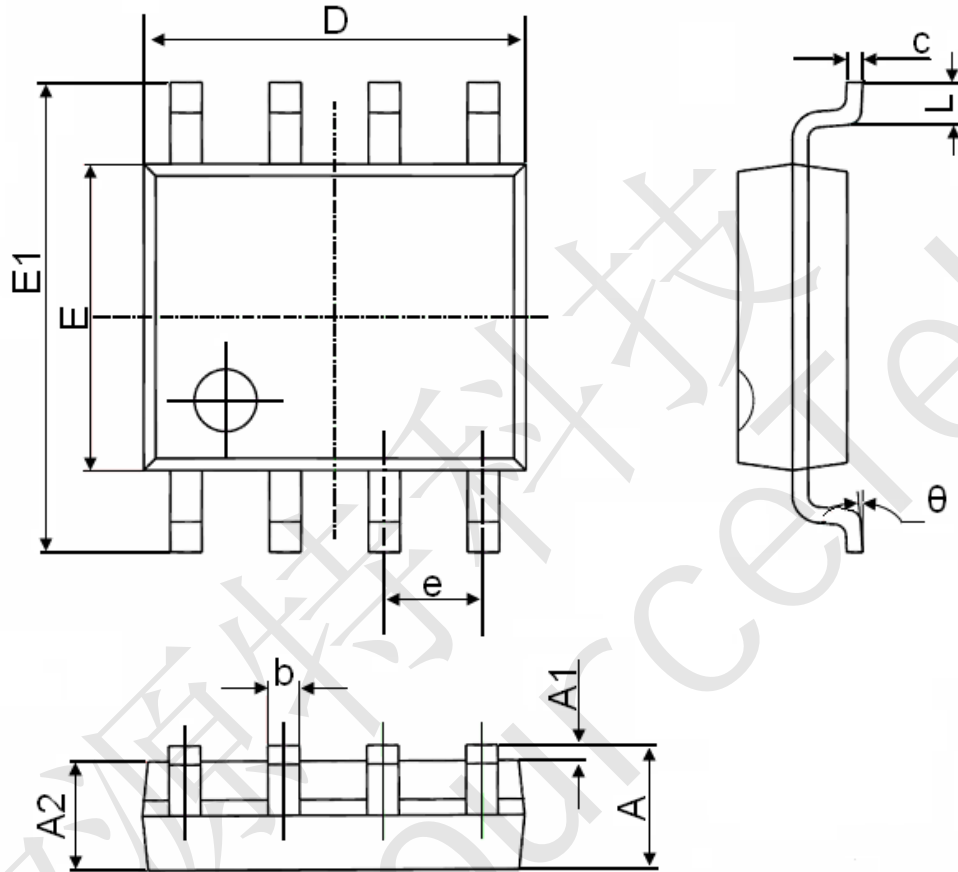

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	1.350	1.750	0.053	0.069
A1	0.100	0.250	0.004	0.010
A2	1.350	1.550	0.053	0.061
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.006	0.010
D	4.700	5.100	0.185	0.200
E	3.800	4.000	0.150	0.157
E1	5.800	6.200	0.228	0.244
e	1.270(BSC)		0.050(BSC)	
L	0.400	1.270	0.016	0.050
θ	0°	8°	0°	8°