



## 30V Complementary Enhancement Mode MOSFET

### DESCRIPTION

The UM4606 is the complementary enhancement mode power field effect transistor is produced using high cell density advanced trench technology to provide excellent  $R_{DS(ON)}$ .

This device is suitable for use as a load switch or in PWM and gate charge for most of the synchronous buck converter applications


### FEATURE

- ◆ 30V/7.0A,  $R_{DS(ON)}=21m\Omega$  @ $V_{GS}=10V$  N\_CH
- ◆ -30V/-6.0A,  $R_{DS(ON)}=33m\Omega$  @ $V_{GS}=-10V$  P\_CH
- ◆ 30V/5.0A,  $R_{DS(ON)}=34m\Omega$  @ $V_{GS}=4.5V$  N\_CH
- ◆ -30V/-5.0A,  $R_{DS(ON)}=38m\Omega$  @ $V_{GS}=-4.5V$  P\_CH
- ◆ Super high design for extremely low  $R_{DS(ON)}$
- ◆ Exceptional on-resistance and Maximum DC current capability
- ◆ Full RoHS compliance
- ◆ SOP8 package design

### APPLICATIONS

- ◆ High Frequency Point-of-Load Synchronous
- ◆ New working DC-DC Power System
- ◆ Load Switch

### PIN CONFIGURATION

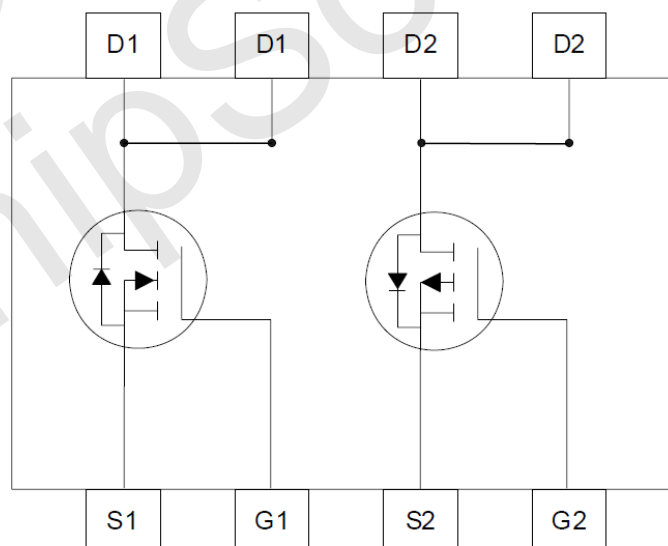

UM4606 Rev B 28/July/2010

TEL: +86-0755-27595155 27595165

FAX: +86-0755-27594792

WEB: [Http://www.ChipSourceTek.com](http://www.ChipSourceTek.com)

E-mail: [Tony.Wang@.ChipSourceTek.com](mailto:Tony.Wang@.ChipSourceTek.com) [InFo@ChipSourceTek.com](mailto:InFo@ChipSourceTek.com)



■ **PART NUMBER INFORMATION**

UM4606A-BB C	A= Package Code S: SOP BB=Handing Code TR: Tape&Reel C=Lead Plating Code G: Green Product
--------------	--

■ **ORDERING INFROMATION**

Part Number	Package Code	Package	Shipping
UM4606S-TR	S	SOP8	3000EA / T&R

- ※ Year Code : 0~9
- ※ Week Code : A~Z
- ※ G : Green Product. This product is RoHS compliant.

■ **ABSOLUTE MAXIMUM RATINGS (  $T_A = 25^\circ\text{C}$  Unless otherwise noted )**

Symbol	Parameter	N-Channel	P-Channel	Unit	
$V_{DSS}$	Drain-Source Voltage	30	-30	V	
$V_{GSS}$	Gate-Source Voltage	$\pm 20$	$\pm 20$	V	
$I_D$	Continuous Drain Current ( $T_A=25^\circ\text{C}$ )	7	-6	A	
	Continuous Drain Current ( $T_A=70^\circ\text{C}$ )				6.5
$I_{DM}$	Pulsed Drain Current	30	-30	A	
$P_D$	Power Dissipation	$T_A=25^\circ\text{C}$	1	1	W
		$T_A=70^\circ\text{C}$	0.8	0.8	
$T_J$	Operation Junction Temperature	-55~150	-55~150	$^\circ\text{C}$	
$T_{STG}$	Storage Temperature Range	-55~150	-55~150	$^\circ\text{C}$	

**Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress rating only and functional device operation is not implied**



■ **N Channel ELECTRICAL CHARACTERISTICS** ( $T_A=25^\circ\text{C}$  Unless otherwise noted)

Symbol	Parameter	Condition	Min	Typ	Max	Unit
<b>Static Parameters</b>						
$V_{(BR)DSS}$	Drain-Source Breakdown Voltage	$V_{GS}=0V, I_D=250\mu A$	30			V
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS}=V_{GS}, I_D=250\mu A$	1.0	1.5	3.0	V
$I_{GSS}$	Gate Leakage Current	$V_{DS}=0V, V_{GS}=\pm 20V$			$\pm 100$	nA
$I_{DSS}$	Zero Gate Voltage Drain Current	$V_{DS}=24V, V_{GS}=0$			1	uA
		$V_{DS}=24V, V_{GS}=0$ $T_J=55^\circ\text{C}$			30	
$R_{DS(ON)}$	Drain-Source On-Resistance	$V_{GS}=10V, I_D=7A$		21	30	m $\Omega$
		$V_{GS}=4.5V, I_D=5A$		34	40	
$g_{FS}$	Forward Transconductance	$V_{DS}=5V, I_D=5A$		7.3		S
<b>Source-Drain Diode</b>						
$V_{SD}$	Diode Forward Voltage	$I_S=1.7A, V_{GS}=0V$		0.76	1.0	V
<b>Dynamic Parameters</b>						
$Q_g$	Total Gate Charge	$V_{DS}=15V$		92		nC
$Q_{gs}$	Gate-Source Charge	$V_{GS}=5V$		8.4		
$Q_{gd}$	Gate-Drain Charge	$I_D=7A$		7.3		
$C_{iss}$	Input Capacitance	$V_{DS}=15V$		407		pF
$C_{oss}$	Output Capacitance	$V_{GS}=0V$		113		
$C_{rss}$	Reverse Transfer Capacitance	$f=1\text{MHz}$		57		
$T_{d(on)}$	Turn-On Time	$V_{DS}=15V$		4.5	18	nS
$T_r$		$V_{GS}=10V$		2.1		
$T_{d(off)}$	Turn-Off Time	$R_G=6\Omega$		19	70	
$T_f$		$R_L=15\Omega$		8.2		

**Note: 1. Pulse test: pulse width $\leq$ 300uS, duty cycle $\leq$ 2%**

**2.Static parameters are based on package level with recommended wire bonding**



■ **P Channel ELECTRICAL CHARACTERISTICS** ( $T_A=25^\circ\text{C}$  Unless otherwise noted)

Symbol	Parameter	Condition	Min	Typ	Max	Unit
<b>Static Parameters</b>						
$V_{(BR)DSS}$	Drain-Source Breakdown Voltage	$V_{GS}=0V, I_D=-250\mu A$	-30			V
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS}=V_{GS}, I_D=-250\mu A$	-1.0	-1.5	-3.0	V
$I_{GSS}$	Gate Leakage Current	$V_{DS}=0V, V_{GS}=\pm 20V$			$\pm 100$	nA
$I_{DSS}$	Zero Gate Voltage Drain Current	$V_{DS}=-24V, V_{GS}=0$			-1	uA
		$V_{DS}=-24V, V_{GS}=0$ $T_J=55^\circ\text{C}$			-30	
$R_{DS(ON)}$	Drain-Source On-Resistance	$V_{GS}=-10V, I_D=-6A$		33	40	m $\Omega$
		$V_{GS}=-4.5V, I_D=-5A$		38	50	
$g_{FS}$	Forward Transconductance	$V_{DS}=-5V, I_D=-4A$		21.7		S
<b>Source-Drain Diode</b>						
$V_{SD}$	Diode Forward Voltage	$I_S=-1.0A, V_{GS}=0V$		-0.77	-1.0	V
<b>Dynamic Parameters</b>						
$Q_g$	Total Gate Charge	$V_{DS}=-15V$		78		nC
$Q_{gs}$	Gate-Source Charge	$V_{GS}=-10V$		6.32		
$Q_{gd}$	Gate-Drain Charge	$I_D=-5.0A$		8.2		
$C_{iss}$	Input Capacitance	$V_{DS}=-15V$		950		pF
$C_{oss}$	Output Capacitance	$V_{GS}=0V$		137		
$C_{rss}$	Reverse Transfer Capacitance	$f=1\text{MHz}$		118		
$T_{d(on)}$	Turn-On Time	$V_{DS}=-15V$		8		nS
$T_r$		$V_{GS}=-10V$		3.5		
$T_{d(off)}$	Turn-Off Time	$R_G=6\Omega$		22		
$T_f$		$R_L=15\Omega$		4		



■ **N Channel TYPICAL CHARACTERISTICS** (25°C Unless Note)

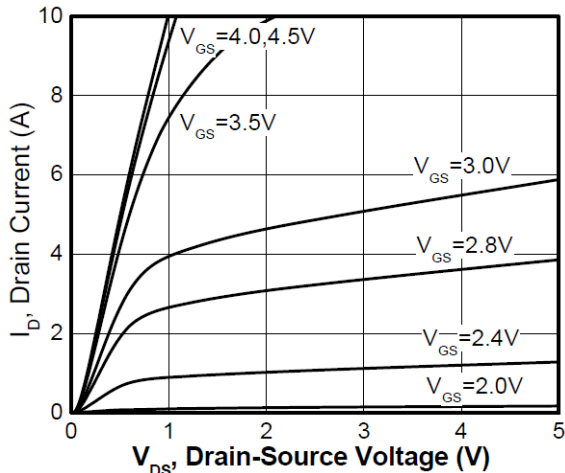


Figure 1. Output Characteristics

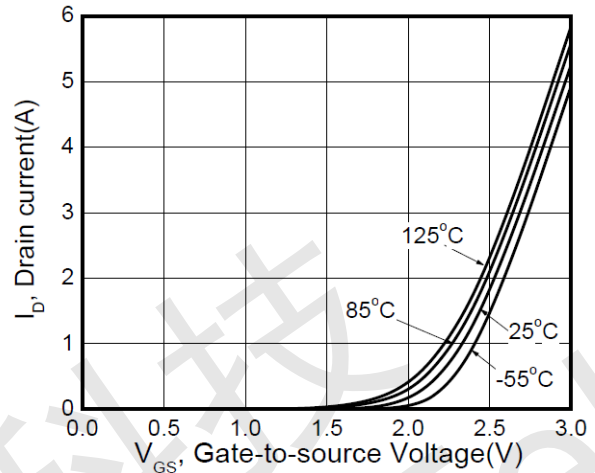


Figure 2. Transfer Characteristics

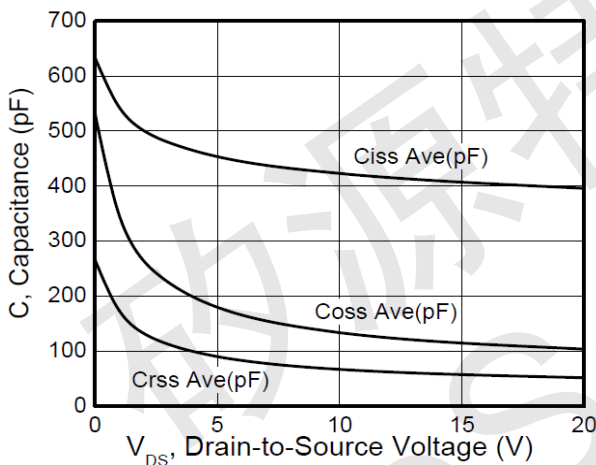


Figure 3. Capacitance

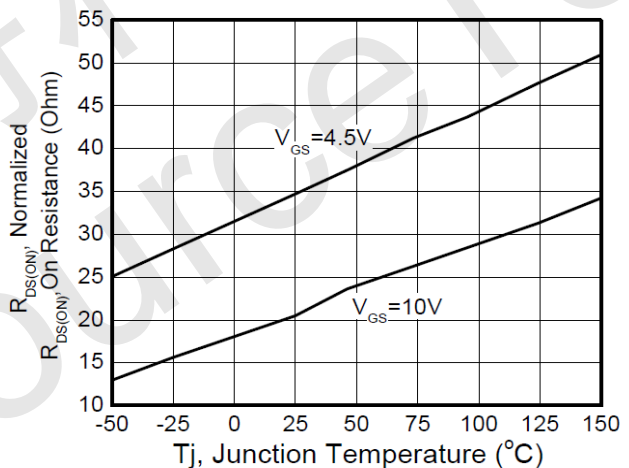


Figure 4. On Resistance Vs. Temperature

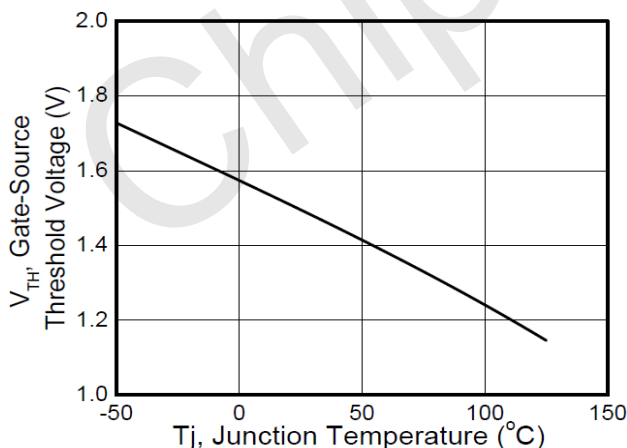


Figure 5. Gate Threshold Vs. Temperature

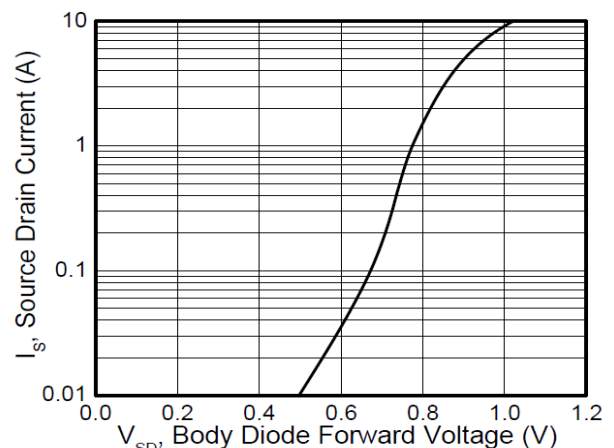


Figure 6. Body Diode Forward Voltage Vs. Source Current



■ **P Channel TYPICAL CHARACTERISTICS** (25°C Unless Note)

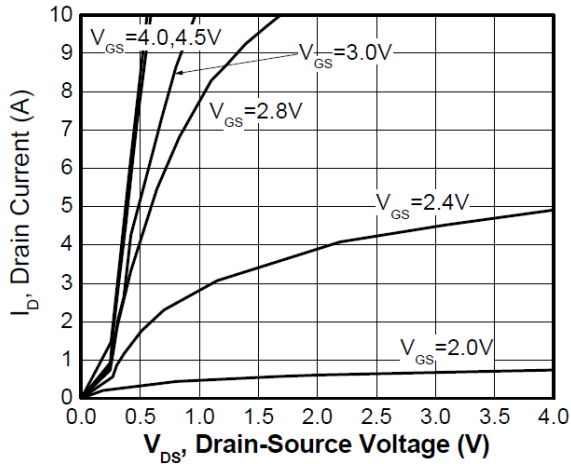


Figure 1. Output Characteristics

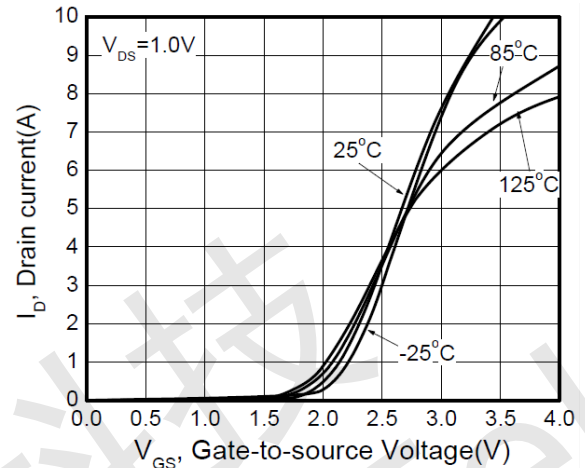


Figure 2. Transfer Characteristics

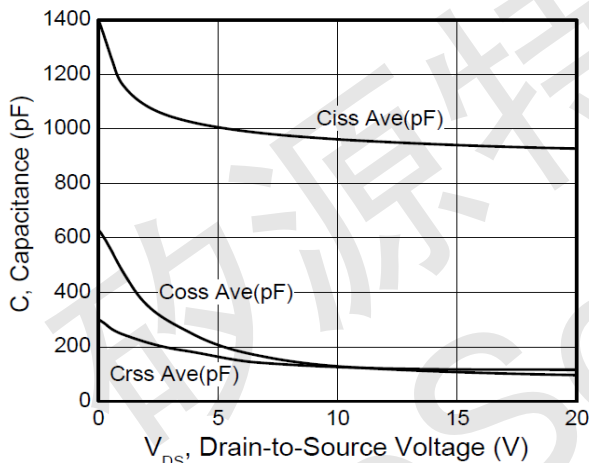


Figure 3. Capacitance

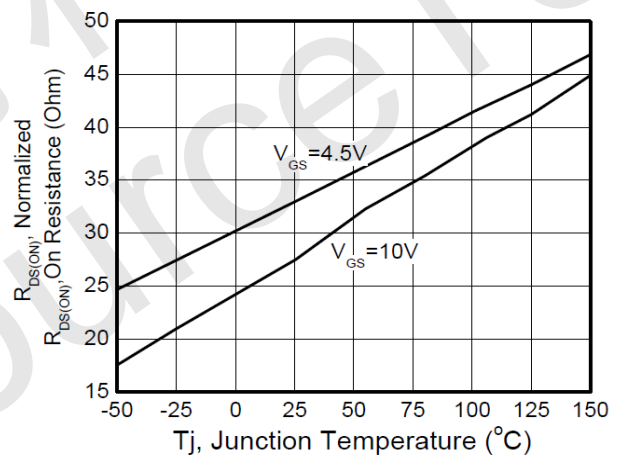


Figure 4. On Resistance Vs. Temperature

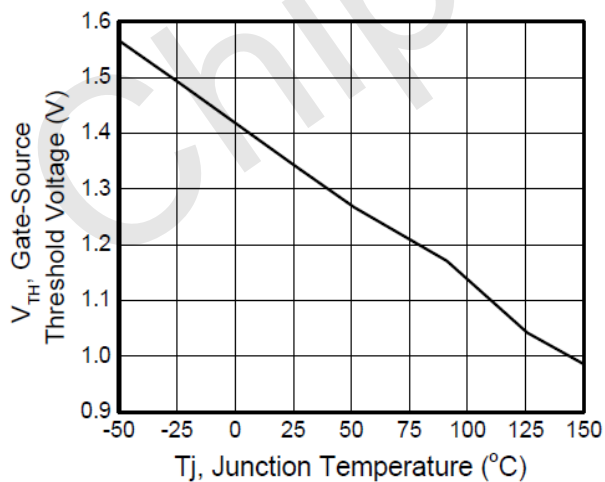


Figure 5. Gate Threshold Vs. Temperature


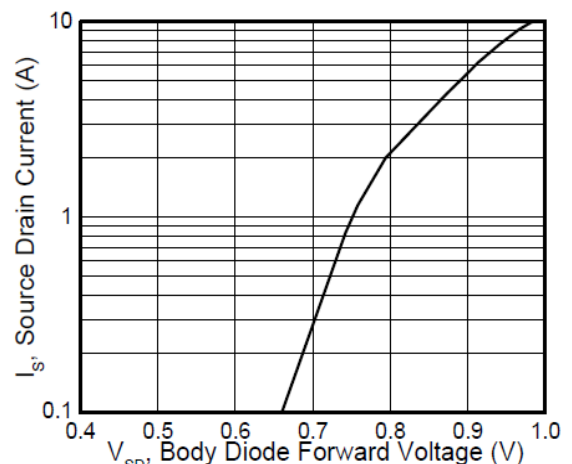


Figure 6. Body Diode Forward Voltage Vs. Source Current



■ SOP8 PACKAGE OUTLINE DIMENSIONS

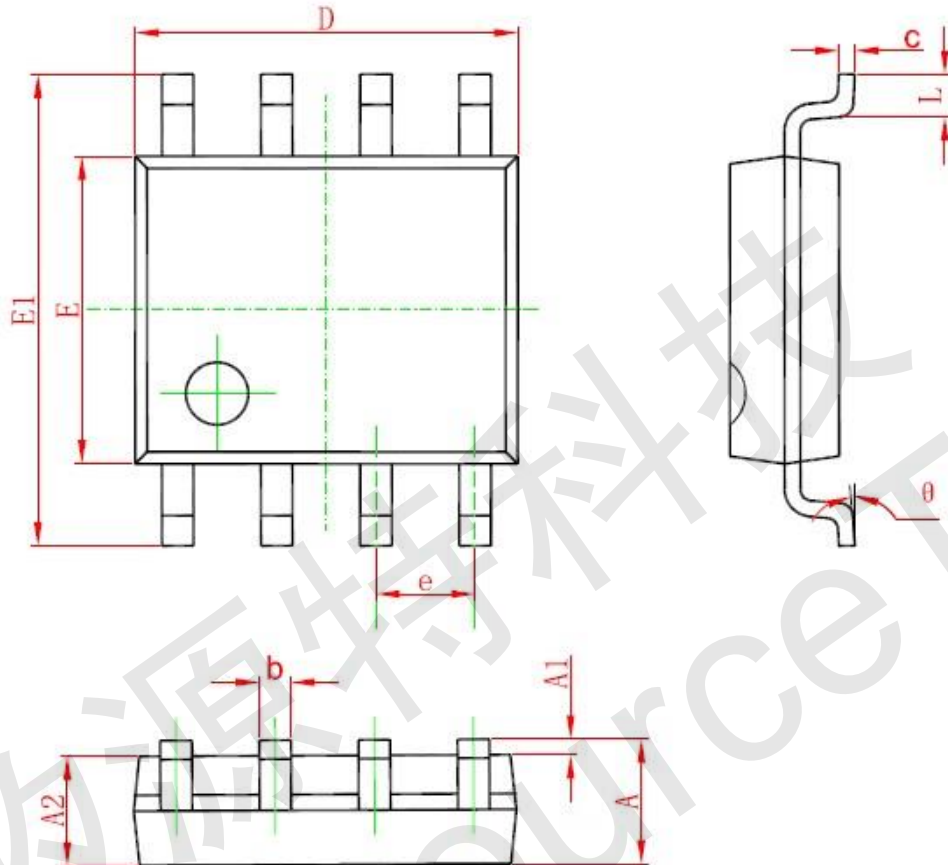

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.350	1.750	0.053	0.069
A1	0.100	0.250	0.004	0.010
A2	1.350	1.550	0.053	0.061
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.006	0.010
D	4.700	5.100	0.185	0.200
E	3.800	4.000	0.150	0.157
E1	5.800	6.200	0.228	0.244
e	1.270 (BSC)		0.050 (BSC)	
L	0.400	1.270	0.016	0.050
$\theta$	0°	8°	0°	8°

UM4606 Rev B 28/July/2010

TEL: +86-0755-27595155 27595165

FAX: +86-0755-27594792

WEB: [Http://www.ChipSourceTek.com](http://www.ChipSourceTek.com)


E-mail: Tony.Wang@.ChipSourceTek.com InFo@ChipSourceTek.com



## ■ SOLDERING METHODS FOR UNIVERCHIP

Storage environment Temperature=10°C~35°C Humidity=65%±15%

Reflow soldering of surface mount device

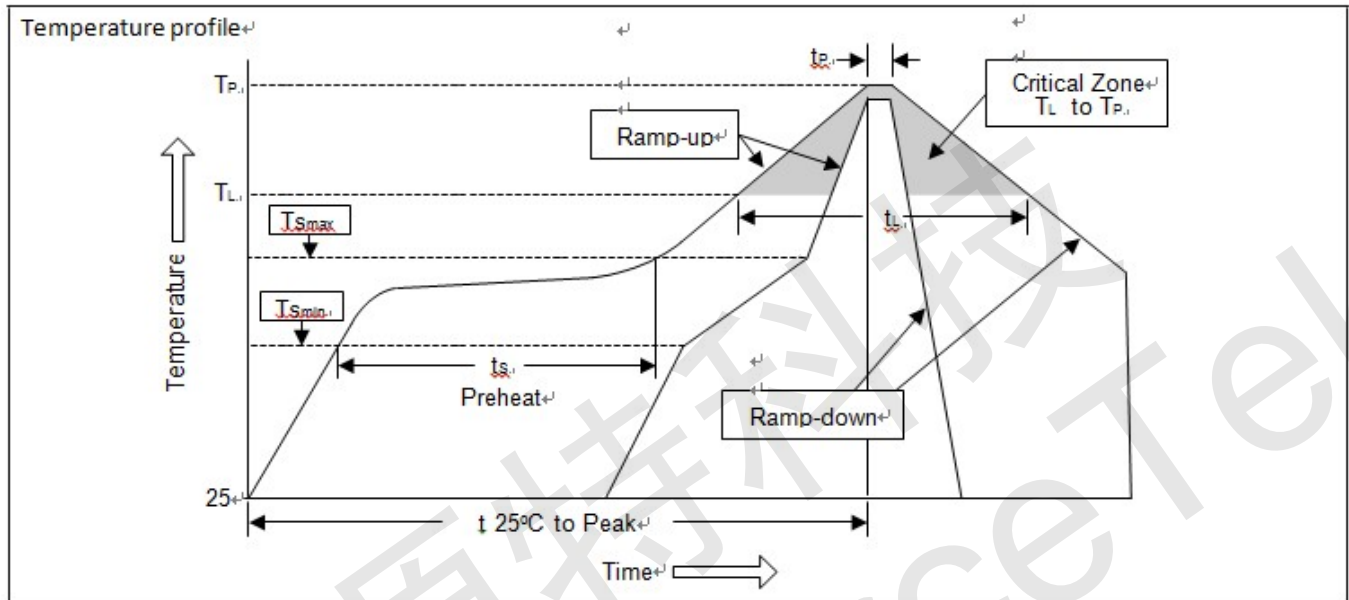

Profile Feature	Sn-Pb Eutectic Assembly	Pb free Assembly
Average ramp-up rate ( $T_L$ to $T_P$ )	<3°C/sec	<3°C/sec
Preheat		
-Temperature Min ( $T_{Smin}$ )	100°C	150°C
-Temperature Max ( $T_{Smax}$ )	150°C	200°C
-Time (min to max) ( $t_s$ )	60~120 sec	60~180 sec
$T_{Smax}$ to $T_L$		
-Ramp-up Rate	<3°C/sec	<3°C/sec
Time maintained above		
-Temperature ( $T_L$ )	183°C	217°C
-Time ( $t_L$ )	60~150 sec	60~150 sec
Peak Temperature ( $T_P$ )	240°C+0/-5°C	260°C+0/-5°C
Time within 5°C of actual Peak Temperature ( $t_P$ )	10~30 sec	20~40 sec
Ramp-down Rate	<6°C/sec	<6°C/sec
Time 25°C to Peak Temperature	<6 minutes	<6 minutes





深圳市矽源特科技有限公司

ShenZhen ChipSourceTek Technology Co. ,Ltd.



Flow (wave) soldering (solder dipping)

Product	Peak Temperature	Dipping Time
Pb device	245°C±5°C	5sec±1sec
Pb-Free device	260°C+0/-5°C	5sec±1sec



This integrated circuit can be damaged by ESD. UniverChip Corporation recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedure can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

矽源特科技  
ChipSourceTek

**UM4606 Rev B 28/July/2010**

TEL: +86-0755-27595155 27595165

FAX: +86-0755-27594792

WEB: [Http://www.ChipSourceTek.com](http://www.ChipSourceTek.com)

E-mail: [Tony.Wang@.ChipSourceTek.com](mailto:Tony.Wang@.ChipSourceTek.com) [InFo@ChipSourceTek.com](mailto:InFo@ChipSourceTek.com)